



The warm heart of your home..



Horse Flame – efficient, cleaner burning and affordable too.

PRODUCED BY THE SAME people who make Ireland's best-selling Olymberyl® stove range, you can be confident that every Horse Flame® stove features the same strong brand credentials –

outstanding quality, supreme reliability and all round value for money.

Less traditional looking then its sister brand. Horse Flame stoves are designed with clean burning in mind. For example all of the stoves benefit from a large airwashed glass, with window sizes generally much greater than rival stoves so you always get a great view of the fire. The Artemis is our most popular stove and has been designed to heat a typical living space efficiently as well as be very easy to use - there's even a small boiler

This is just one of the impressive choice of boiler options. The biggest being the 26 kW *Firebird* boiler stove which is capable of heating up to 16 radiators. All of our boilers are guaranteed for 5 years (along with the bodywork) to provide you with real peace of mind.

version which can heat up to two

radiators or provide domestic hot

water, making it the ideal choice

for a holiday cottage or workshop.

CE Tested & Approved in Europe EN13240 Standard ISO 9001:2000







With the Horse Flame range there's a stove for every situation – the superb wood burning Pony (top), the black enamel Regis (middle) and the big Yarrman 18kW boiler, all make a wonderful focal point for any living space.

The Firebird 3 HF577B



UNTIL NOW there has been an extremely limited choice of high output wood and multi fuel boiler stoves capable of delivering the kind of heat that larger properties need. Try and find one that will also look equally good in a traditional or contemporary styled home...

Enter Horse Flame's new Firebird 3 designed and built by the same people who make Ireland's biggest selling boiler stoves, so you can be sure that it will give you many years of trouble-free performance.

Firebird's solid cast iron construction, subtle detailing and supremely practical fire chamber along with easy-lock double doors simply put it in a class of its own. And then there's the competitive price...

Performance and Sizes

Nom output - room 10.0kW / 34,140BTU Nom output - water 16.0kW / 54,620BTU Minimum efficiency - wood Maximum CO emissions 0.3% Top flue outlet only (mm) 6" / 150 Log length (mm) 18" / 450 Stove net weight (Kg) 232.0 Dimensions H830 W800 D600 From centre of top flue to back (mm) 200 Clearance to combustible materials (mm): Top **800** Sides **300** Rear **300**





The Artemis HF317



larformance and Sizes

Nominal output 5.0kW / 17,070BTU Minimum efficiency - wood < 71.0% Maximum CO emissions 0.3% Top or rear flue outlet (mm) 5" / 125 12" / 300 Log length (mm) Stove net weight (Kg) 87.0 Dimensions H**670** W**455** D**420** Height to centre of rear flue (mm) 580 From centre of top flue to back (mm) 150 Clearance to combustible materials (mm): Top **800** Sides **600** Rear **700**

The Windsor HF317B



Performance and Sizes

Nom output - room 3.0kW / 10,240BTU

Nom output - water 3.0kW / 10,240BTU

Minimum efficiency - wood < 75.0%

Maximum CO emissions 0.3%

Top or rear flue outlet (mm) 5" / 125

Log length (mm) 12" / 300

Stove net weight (Kg) 96.0

Dimensions H670 W455 D420

Height to centre of rear flue (mm) 580

From centre of top flue to back (mm) 150

Clearance to combustible materials (mm):

Top 800 Sides 300 Rear 200

The Pony HF557



Performance and Sizes

Nominal output 8.0kW / 27,300BTU Minimum efficiency - wood < 75.0% Maximum CO emissions 0.3% 6" / 150 Top or rear flue outlet (mm) 14" / 350 Log length (mm) Stove net weight (Kg) 139.0 Dimensions H680 W550 D480 Height to centre of rear flue (mm) 500 From centre of top flue to back (mm) 150 Clearance to combustible materials (mm). Top **800** Sides **600** Rear **450**

The Regis HF517B



Performance and Sizes

Nom output - room
Nom output - water

6.5kW / 22,190BTU

6.5kW / 22,190BTU

75.0%

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 150

6.7 15

The Elessar HF717



Performance and Sizes

Nominal output 12.0kW / 40,960BTU Minimum efficiency - wood < 72 0% Maximum CO emissions 0.3% 6" / 150 Top or rear flue outlet (mm) Log length (mm) 15" / 375 Stove net weight (Kg) 195.0 Dimensions H890 W610 D550 Height to centre of rear flue (mm) 710 From centre of top flue to back (mm) 250 Clearance to combustible materials (mm): Top **800** Sides **500** Rear **950**

The Yarrman HF717B



Performance and Sizes

Nom output - room 5.5kW / 18,770BTU

Nom output - water 12.5kW / 42,670BTU

Minimum efficiency - wood < 79.0%

Maximum CO emissions 0.3%

Top or rear flue outlet (mm) 6" / 150

Log length (mm) 15" / 375

Stove net weight (Kg) 96.0


Dimensions H890 W610 D600


Height to centre of rear flue (mm) 710

From centre of top flue to back (mm) 250

Clearance to combustible materials (mm):

Top 800 Sides 150 Rear 150

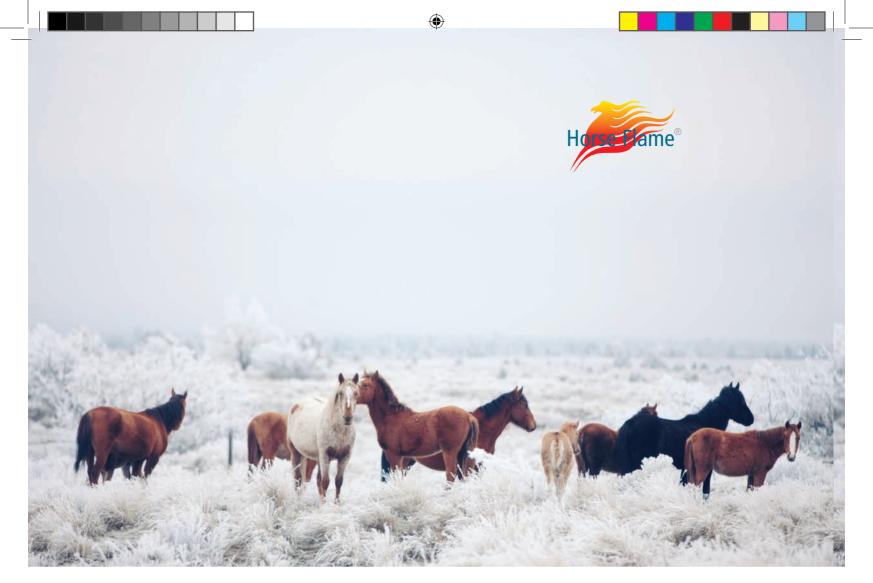

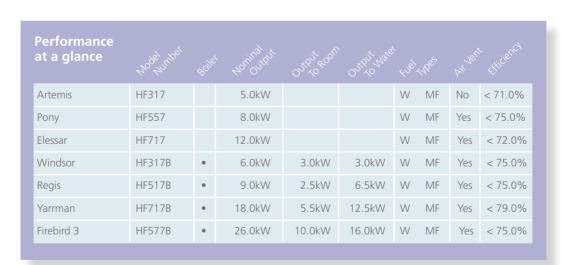

UK Mainland & Isle of Man Hi-Flame Fireplace (UK) Ltd Holmes Chapel Business Park Manor Lane Holmes Chapel Cheshire CW4 8AF

sales@hi-flame.com

N. Ireland & Republic of Ireland
The Stove Yard
Kiltonga Industrial Estate
Old Belfast Road
Newtownards
County Down BT23 4TJ
sales@thestoveyard.com

www.hi-flame.com

©Hi-Flame Fireplace (UK) Ltd 2010 Horse Flame® and all product names used within this brochure are the original trading and registered names of Hi-Flame Fireplace (UK) Limited